

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/009909 A1

- (51) International Patent Classification⁷: **E01F 15/10**
- (21) International Application Number:
PCT/AU2003/000942
- (22) International Filing Date: 24 July 2003 (24.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002950330 24 July 2002 (24.07.2002) AU
- (71) Applicant (for all designated States except US): **WAY-
TOGO AUSSINDO PTY LTD [AU/AU]**; 5 Carol Avenue,
Springwood, Queensland 4127 (AU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CAREY, Anthony, J.**
[AU/AU]; 5 Carol Avenue, Springwood, Queensland 4127
(AU).
- (74) Agent: **CULLEN & CO.**; Level 26, 239 George Street,
Brisbane, Queensland 4000 (AU).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: RELOCATABLE TRANSPORTABLE SAFETY CRASH BARRIER SYSTEM

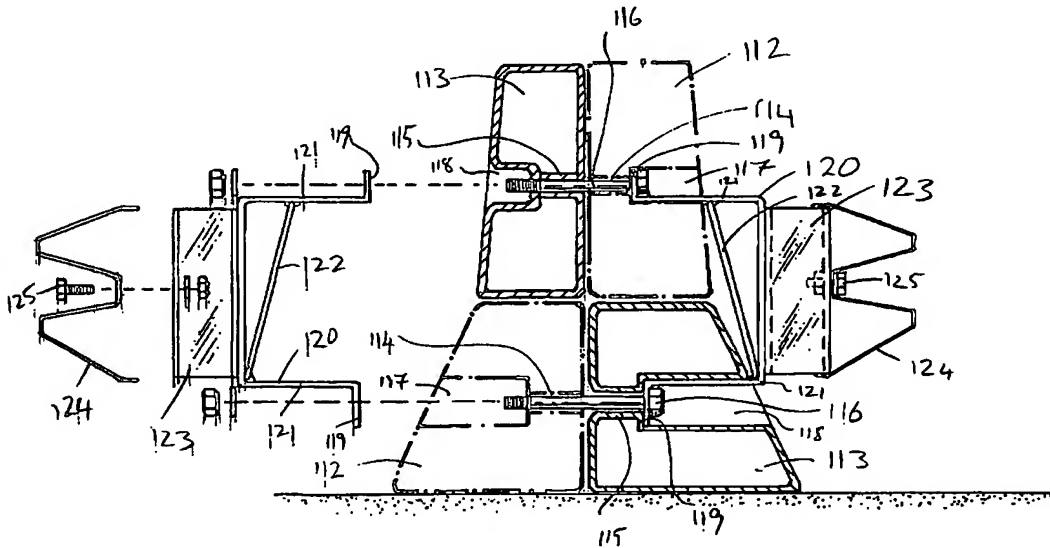

(57) Abstract: A relocatable traffic barrier system including a plurality of elongate barrier modules (112, 113) connected end-to-end, each module having a cavity for receiving a ballast of a fluid material wherein the barrier system includes at least one crash rail (124) extending lengthwise along at least one side of the plurality of elongate barrier modules wherein the at least one crash rail is secured to selected elongate barrier modules by a deformable member (123), said deformable member being disposed between the at least one crash rail and the selected elongate barrier modules.